


Schemat montażowy węzłów W11, W12, W13, W14, W15, W16, W18, W20, W21, W22, W23, W24, W25, W26, W27, W28, W29, W30, W31, W33, W34, W35, W36, W37, W38, W40, W44, W45

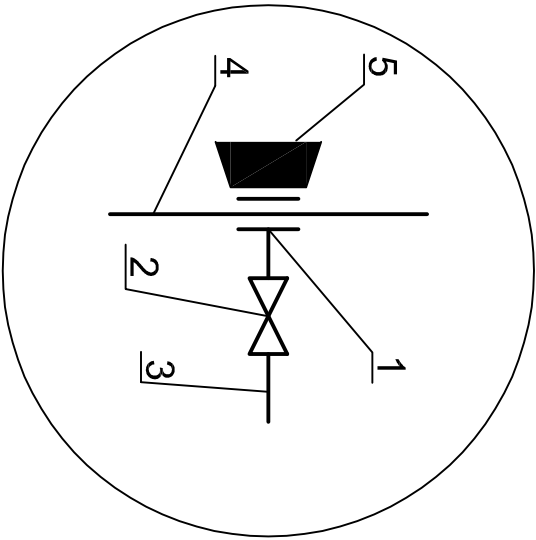

- Opaska do nawiercenia Hawex z odejściem
- Gwintowany Hawex dn 110/32
- Złotnik PE d110/110/90°
- Projektowany rurociąg PE d 110
- Złotnik PE d 40

Poziom porównawczy 0,00 m n.p.m.

Rzędna terenu istniejącego	11,50	11,53	
Rzędna osi rurociągu [m]	10,00	10,10	10,10
Zagłębienie osi rurociągu	1,50	10,45	11,65
Spadek	5,0 ‰		
Materiał	PE100	PE100	PE100
Długość trasy [m]	0,00	2,00	9,00

